

PERISTALTIC PUMP MP2 SPEEDY PH

Data
Sheet

DESCRIPTION

- ✓ Peristaltic pump with built in controller
- ✓ Suitable for acid chemicals dosing
- ✓ Set Point easy calibration between 6.0 - 8.0 PH interval
- ✓ Calibration on one value 7.00 PH
- ✓ PH values showed on display in real time
- ✓ Set point proportional dosage with ON/OFF timings of 150 seconds
- ✓ Overdose or end-product time alarm
- ✓ Probe's health state detection
- ✓ Digital display and segments
- ✓ Dosage and state led alarm
- ✓ Standard Power Supply 230 Vac 50-60 Hz
- ✓ Reinforced PP body
- ✓ SAN glass front cover
- ✓ PBT roller holder with 2 rollers
- ✓ Easily programmable and minimum maintenance
- ✓ IP 55 protection degree
- ✓ CE approved



OPTIONAL


- ✓ ON / OFF switch
- ✓ SCHUKO plug

DESCRIPTION	
Standard configuration	
Box	Polipropilene glass charged
Roller	DELRIN
Tube	Santoprene
Power supply	230 Vac 50 – 60 Hz
Consumption	12 Watt
Weight	1,6 kg
Fittings	PP rings for tube 4 x 6 mm
Probe connection	BNC
Injection valve / foot filter	Lip Valve (PP + VT)
Suction tube	PVC 4 x 6
Delivery tube	PE 4 x 6

PERISTALTIC PUMP MP2 SPEEDY PH

Data
Sheet

TECHNICAL SPECIFICATIONS							
Standard	Flow		Pressure		Tube material	Tube measures [mm]	RPM
	[l/h]	[cc/min]	[Bar]	[PSI]			
1,5 – 01	1,5	25,00	1	14,5	Santoprene	5,8 x 9,4	10

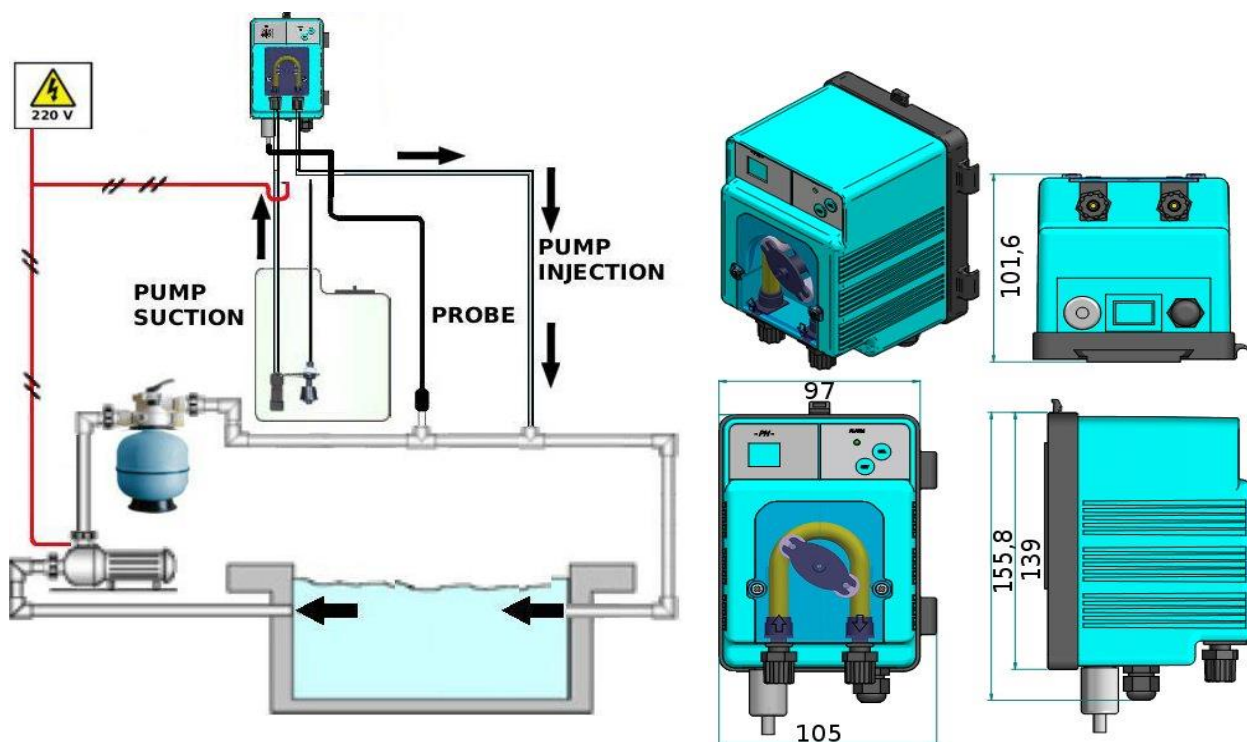

ACCESSORIES								
STANDARD KIT					INSTALLATION KIT SOLD SEPARATELY			
Nr. 1 Injection valve 1/2" PP-Lip valve-Viton®	Nr. 1 Aspiration filter 1/2" PP-injection valve-Viton®	Nr. 1 Delivery tube 2mt PE 4x6	Nr. 1 Suction tube 2mt PVC 4x6		Nr. 1 PH cable electrode 5 mt. Epoxy body	Nr. 1 Buffer solution (pH 7)	Nr. 2 Gripping collars Ø50 att. 1/2"	Nr. 1 Pipe probe holders 1/2" PP
